


Multi-Layer Ceramic Capacitors

Tape and Reel Packaging Specifications

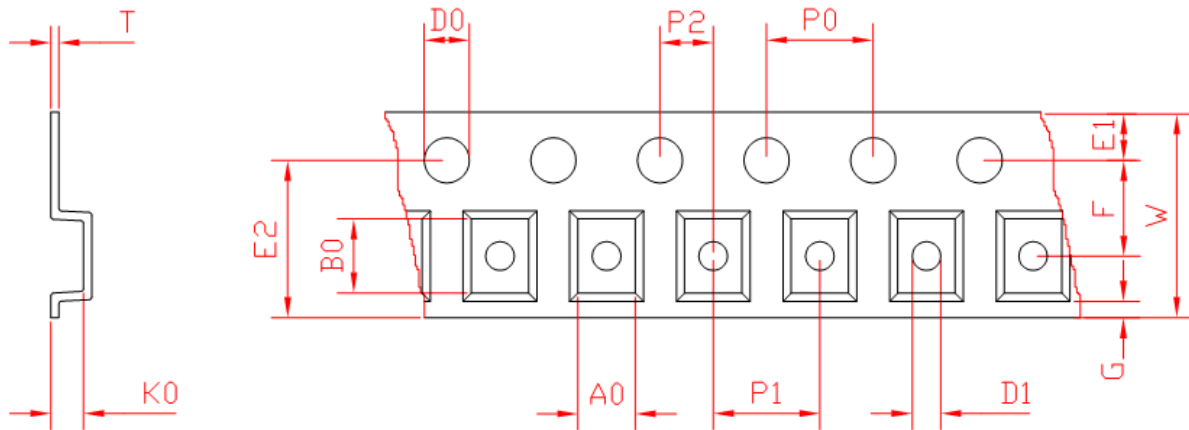

Chip Size	Type ⁽¹⁾	W	F	P1	T
A (0505)	H	8.00 ±0.30mm	3.50 ±0.05mm	4.00 ±0.10mm	0,25mm (max.)
A (0505)	V	8.00 ±0.30mm	3.50 ±0.05mm	4.00 ±0.10mm	0,25mm (max.)
S (0603)	H	8.00 ±0.30mm	3.50 ±0.05mm	4.00 ±0.10mm	0,40mm (max.)
F (0805)	H	8.00 ±0.30mm	3.50 ±0.05mm	4.00 ±0.10mm	0,40mm (max.)
B (1111)	H	8.00 ±0.30mm	3.50 ±0.05mm	4.00 ±0.10mm	0,30mm (max.)
B (1111)	V	8.00 ±0.30mm	3.50 ±0.05mm	4.00 ±0.10mm	0,25mm (max.)
X (2225)	H	12.00 ±0.30mm	5.50 ±0.05mm	12.00 ±0.10mm	0,45mm (max.)
E (4040)	H	24.00 ±0.30mm	11.50 ±0.10mm	16.00 ±0.10mm	0,45mm (max.)
E (4040)	V	32.00 ±0.30mm	14.20 ±0.10mm	24.00 ±0.10mm	0,55mm (max.)

Chip Size	Type ⁽¹⁾	Reel Size	Quantity per Reel
A (0505)	H	180mm	3'000
A (0505)	V	180mm	3'000
S (0603)	H	180mm	4'000
F (0805)	H	180mm	4'000
B (1111)	H	180mm	1'000
B (1111)	V	180mm	1'000
X (2225)	H	330mm	500
E (4040)	H	330mm	700
E (4040)	V	381mm	350

(1): Horizontal (H) or Vertical (V) orientation in cavities.